



Godrej

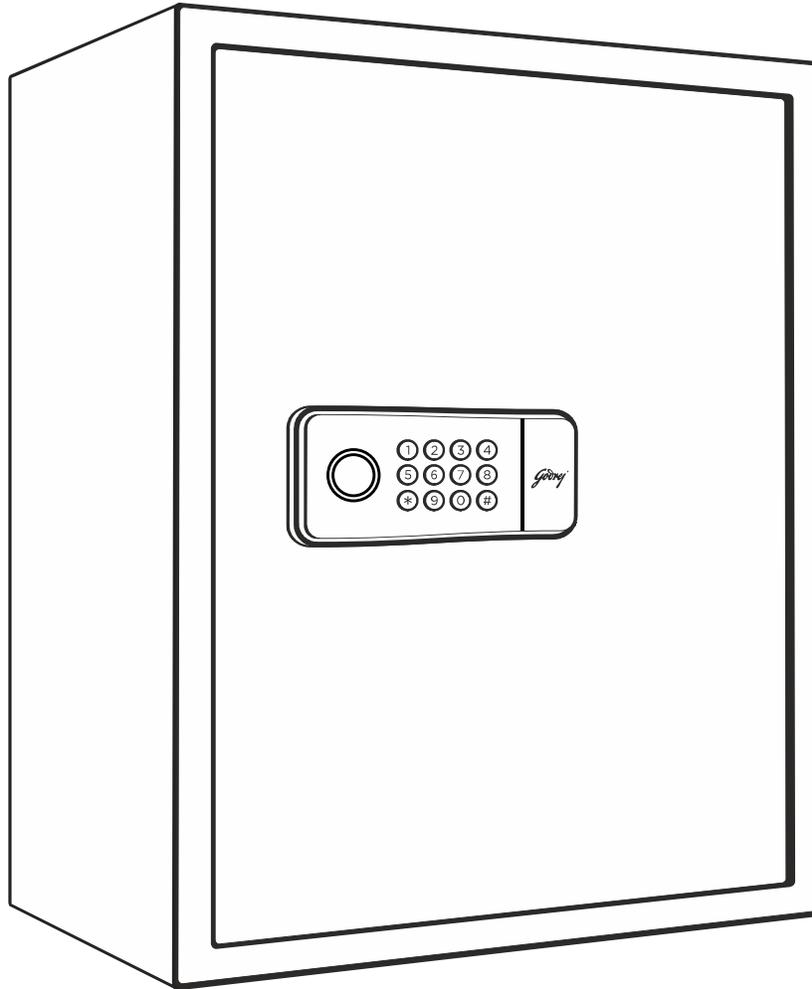

NX PRO PLUS SAFES

USERMANUAL

NX PRO PLUS SAFES

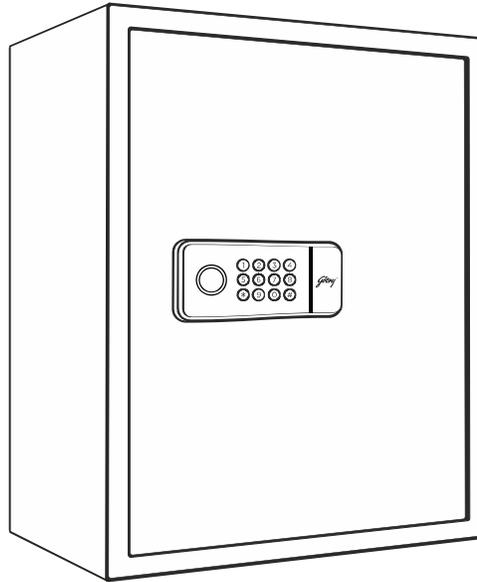

NX PRO PLUS (DIGI+BIO)

NX Pro Plus (Digi+Bio) is a compact, secure and affordable option to safeguard your precious possessions.

Ideal for



Daily use
valuables



10X
Stronger



Dual Mode
Access Digi+Bio



Motorised Lock for
Enhanced Safety



Voice Based
Acknowledgment



In-built I-Buzz
Alarm System

Model	Dimensions in cm (HxWxD)	Net weight (Kg.)	Volume (Ltr)
15L	25 x 35 x 25	8.7	15
30L	32 x 40 x 32	15.8	30
45L	50 x 35.5 x 33	20.9	45
70L	55.8 x 37 x 44.5	27.1	70

1. IMPORTANT INSTRUCTIONS

Please keep this manual and override keys in a safe place (**NOT INSIDE THE LOCKER**)

Make sure that the locker is anchored properly as there is a possibility that it can fall and hurt people or property.



DO NOT use any liquid while cleaning the keypad, you could use a damp cloth if required.



DO NOT place any liquid on top of the locker, a spill on the keypad may damage the locker inoperable.



DO NOT overstuff the locker or you may damage the motor mechanism or the contents.




DO NOT place the safe in direct sunlight in case of Biometric. For security purposes, you should change the factory default code i.e. Personal Code and Master Code as soon as possible.




DO NOT open the back cover or try to repair the locker yourself. In case of any problem contact GSS call center at **1800 20 999 55** or write to us at secare@godrej.com

Note: For security purposes, you should change the factory default code i.e. Personal Code and Master Code as soon as possible. Godrej Security Solutions shall not be responsible for only theft caused by such negligence.

2. PACKAGE CONTENTS




Locker (1)




1.5V AA
Alkaline Battery (4)



Carpet (1)



Mechanical Override Key (2)




Anchoring Screw (4)



User Manual (1)

3. KNOW YOUR PRODUCT

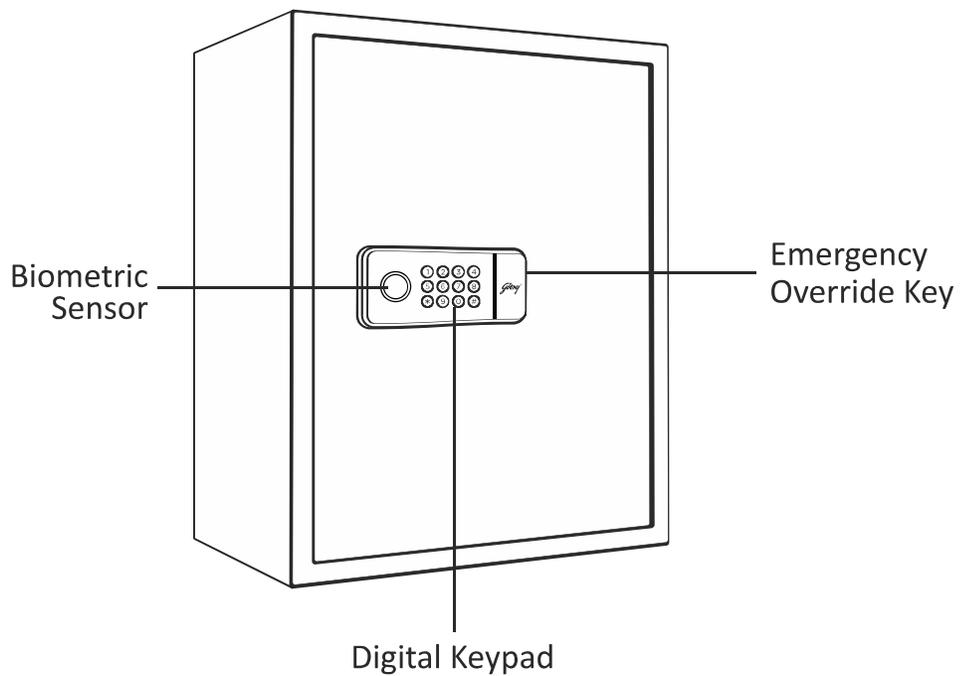

4. OPEN YOUR SAFE FOR THE FIRST TIME

To open the safe for the first time, use the Emergency Override Key and follow the below sequence.

Insert the Emergency Override Key and rotate it in an anticlockwise direction. Hold the key in this position.

Pull the door to open the safe.

Caution: After setting up fingerprints or passwords, remove the emergency key and store it in a secure location (not inside the safe).

5. BATTERY INSERTION

Open the door of the safe.

Locate the battery cover on the back side of the door.

Insert 4xAA 1.5V Alkaline batteries into the battery compartment.

6. PROCESS TO SET USER CODE/FINGER PRINT

Open the safe door.

Press the "SET" button, and a voice prompt will ask you to either place your finger on the scan sensor or enter your user code.

Enter your 6-digit password and touch the "#" key or place your finger on the scanner.

The voice prompt will ask you to repeat the procedure. Repeat the same process.

Upon successful registration, you will hear the voice prompt "Registration complete."

You can enrol up to 50 fingerprints and set 10 user codes (6 digits) using this procedure.

The default first User code is 123456

Note: User code can not be set using repetitive numbers (i.e. 111111, 222222, ...999999)

7. PROCESS TO SET THE MASTER CODE

Touch the button area when the backlight is ON.

Touch the "*" button twice, then enter the existing master code and touch "#" key.

You will hear a voice prompt asking you to enter a new master code. Enter the new 6-digit master code and touch "#" key.

The voice prompt will ask you to repeat the process. Perform the operation again and touch "#" key.

You will hear the announcement "Operation Complete". This indicates the successful change of the master password.

The default Master code is 800000

Note: Please avoid using your safe in factory default mode, where the safe can be opened with any finger or the default code. Godrej Security Solutions will not be responsible for any theft attempts.

8. PROCESS TO OPEN/CLOSE THE SAFE WITH REGISTER CODE/FINGER

Place your registered finger on the sensor or enter your password, then touch "#" key.

Upon successful verification, the safe will provide a voice prompt saying "Verification Complete", and the door will unlock.

To close the safe, touch "#" key, and the safe will give a voice prompt confirming the closure by saying "Closed". This indicates that the safe door has been closed successfully.

In case of an incorrect fingerprint attempt, the fingerprint light will change from blue to red, and a voice announcement will declare "Verification Failed".

For an incorrect password entry, the keypad light will blink twice, accompanied by a voice announcement of "Verification Failed".

Note: After 5 consecutive unsuccessful attempts with the wrong fingerprint or code, the system will go into a lockout mode for 5 minutes. The safe will voice prompt "System Locked", and the keypad light will blink slowly during this lockout period. Both the keypad and fingerprint sensor will remain deactivated for 5 minutes.

9. DUMMY PASSWORD FUNCTION

The Safe features a dummy password function.

Touch the panel area to input a sequence of numbers up to a total length of 20 digits.

Include the correct password string within the sequence. Conclude by touching the "#" key.

The safe will respond with a voice prompt affirming "Verification completed" (verification).

The safe will automatically initiate the opening process upon successful verification.

Once the safe is successfully opened, a voice Prompt will announce "Opened."

10. LOW BATTERY ALERT

If you open the safe door and hear a "battery low" prompt, promptly replace the batteries. In case the batteries are completely drained out, utilize a power bank or mobile charger to power the safe via the Type-C port.

11. VOICE PROMPT ON/OFF

To deactivate the Voice prompt, input code "***554" and touch "#" key.

To reactivate the voice prompt, input code "***554" and touch "#" key. You will receive the voice prompt "Operation complete," indicating the restoration of the voice prompt feature.

12. I BUZZ (ALARM) ACTIVATION AND SENSITIVITY SETTING

To modify I buzz functionality or sensitivity, follow these steps after opening the safe:

Enter code "***9110" and touch "#" key to deactivate the alarm functionality.

Enter code "***9111" and touch "#" key to set alarm logic to high sensitivity.

Enter code "***9112" and touch "#" key to set alarm logic to medium sensitivity.

Enter code "***9113" and touch "#" key to set alarm logic to lower sensitivity.

Note: The factory default I buzz function is deactivated.

Caution: I buzz logic won't function when the safe door is left open.

13. PROCESS TO ACTIVATE DUAL MODE

To change dual mode settings, it is mandatory to open the safe first.

- Enter "***551" and touch on "#" key. Then safe gives voice prompt as "please verify administrator".
- Use any registered finger or code for verification. After successful validation safe gives voice prompt as "combination of opening method". In combination mode, one of the 50 registered fingerprints and any 1 of the 10 set passwords can be used together to unlock the safe.
- To restore safe back from combination method to single method opening, Just repeat above procedure again. i.e Enter "***551" and touch on "#" key. Then safe gives voice prompt as "please verify administrator". Use any registered finger or code for verification. After successful validation safe gives voice prompt as "Single opening method".

Note: Factory default Safe is in "Single Opening Method".

14. PROCESS TO RESET THE SAFE

Open the safe door first, Press and hold the “SET” button for 5 seconds, till you hear long beep “DiDiDi”, Then immediately release the SET button and you will hear “Reset Complete”.

15. PROCEDURE FOR ESTABLISHING A THREE-DIGIT PASSWORD FOR THE INTERNAL LOCKER'S COMBINATION NUMBER LOCK

(Applicable Exclusively to the 70-Litre Variant)



Fig.1



Fig.2



Fig.3

Ⓞ Open the locker using the default password, which is 123.

📍 Locate the slider on the backside of the door (Refer to Figure 1).

➡ Move the slider gently upward and then to the extreme left (as shown in Figure 3).

🔢 Set your new three-digit password on the combination number lock.

➡ After setting the password, return the slider to its original position (as shown in Figure 1).

Note: Above procedure is applicable exclusively to the internal locker of the 70-Litre NX Pro PLUS Variant.

16. MOUNTING

Mounting Through The Bottom Of The Safe:

- Check the type of floor (wood, tile, concrete).
- Obtain appropriate anchors for the specific floor type.
- Inspect the floor for hidden wires or pipes.
- Mark the floor for drilling anchor holes.
- Drill holes of the suitable size for the chosen anchors.
- Securely mount the safe and ensure its stability.
- Consider using carriage bolts through the top of a cabinet for mounting to its top.
- If mounting in a cabinet or closet shelf, anchor it to the wall behind the safe.

Mounting Through The Back Of The Safe:

- Verify the structural integrity of the wall or cabinet.
- Enlist assistance to hold the safe during the mounting process.
- Check for hidden wires or pipes on the chosen location.
- Mark the wall or cabinet for drilling anchor holes.
- Drill holes of the appropriate size for the selected anchors.
- With someone holding the safe, anchor it securely to the wall.

Mounting Tips:

- Choose either wall, cabinet, or floor mounting.
- Ensure that the selected wall or cabinet can support the safe's weight.
- Prioritize load-bearing capacity to prevent the safe from falling and causing damage or harm.

17. REPLACING THE BATTERIES

Open the safe using registered finger or password. If the batteries are dead, Use the emergency override key.

Remove the battery cover and remove all four used batteries.

Replace the batteries with four 1.5V AA alkaline batteries.

Put back the battery cover.

Disposed the used batteries in an environmental friendly way.

Keeping the door open and ensure safe working fine.

Note: C type USB provision is available near to Emergency override to power on the safe in case the batteries drains out completely.

18. EMERGENCY OVER RIDE KEY

In situations like receiving the safe for the first time or encountering emergencies such as battery depletion or a forgotten password, you can employ the following procedures:

- Insert the emergency override key and rotate it anti clockwise while holding it in that direction.
- Gently pull the door to open the safe.

Caution: Keep the emergency key outside the safe and accessible for emergency use only.

19. INFORMATION ON E-WASTE HANDLING AND MANAGEMENT

Dear Customer,

The Ministry of Environment and Forest and Climate Change have published The E-waste (Management) Rules 2022, which came into effect from 1st day of April 2023.

- E-waste means electrical and electronic equipment, including solar photo-voltaic modules or panels or cells, whole or in part discarded as waste, as well as rejects from manufacturing, refurbishment and repair process.
- These rules shall apply to every manufacturer, producer, refurbisher, dismantler and recycler involved in manufacture, sale, transfer, purchase, refurbishing, dismantling, recycling and processing of e-waste or electrical or electronic equipment listed in Schedule-I of the rules including their components, consumables, parts and spares which make the product operational but shall not apply to
 - (a) Waste batteries as covered under the Battery Waste Management Rules 2022
 - (b) Packaging plastics as covered under the Plastic Waste Management Rules 2016
 - (c) Micro enterprises as defined in the Micro, Small and Medium Enterprises Development Act, 2006
 - (d) Radio-active wastes as covered under the provisions of the Atomic Energy Act, 1962 and rules made thereunder.
- Under these rules, specific roles and responsibilities are defined for manufactures, producers, bulk consumers, refurbishers and recyclers. Under Extended Producer Responsibility any producer of electrical or electronic equipment as given in Schedule-I for meeting recycling targets as per Schedule-III and Schedule -IV, only through registered recyclers of e waste to ensure environmentally sound management of such waste.
- E-waste is to be managed in an environmentally sound manner which means, taking steps to ensure that health and environment are protected from adverse effects of hazardous substance contained in such wastes.
- Rule 6 of the E-waste (Management) Rules 2022 interalia states that the producer of electrical and electronic equipment listed in Schedule -I shall be responsible for creating awareness through, media, publications, advertisements, posters or by any other means of communication.
- Rule 16 of the E- Waste (Management) Rules 2022 states reduction in the use of hazardous substances in the manufacture of electrical and electronic equipment and their components or consumables or parts or spares and every producer shall comply with the requirements under the rule.
- All consumers of electrical and electronic equipment irrespective of their status as bulk consumers or not, shall ensure that e-waste generated by them is channelized through registered recyclers or is returned to the pickup/take back services provided by the producers and recyclers. **Please refer to our website <https://www.godrej.com/godrej-security-solutions#GreenThink> under the 'Green Think' section of Godrej Security Solutions Division Page for more details on registered recyclers and collection centers/pick up points of the company.**
- All our products intended to be recycled under the category of e-waste (as defined above) carry a label or stamp of the WEEE symbol (A wheelie bin with a cross), which states that it falls under the hazardous waste category and is not to be disposed of along with normal garbage.



We seek your support in ensuring environmentally sound management of e-waste and aid us in sustaining our earth's natural resources and maintaining the earth's green cover intact for the benefit of our future generations.

RECORD OF PURCHASE

Please fill your details below for future reference.

Date of purchase: _____

Product model: _____

Name & address of Distributor/Dealer: _____

Distributor phone number: _____

FOR SAFETY, PLEASE READ THIS MANUAL PRIOR TO USE.



Godrej & Boyce Mfg. Co. Ltd., Godrej Security Solutions
Regd. Office: Plant No. 17, Pirojshanagar,
Vikhroli, Mumbai - 400079

 **Toll Free:** 1800 209 9955 (**Sales & Service**)

 **Whatsapp Support:** +91 9321665511 (**Service**)

 **Visit:** www.godrejsecure.com

 **Email:** secure@godrej.com (**Sales**), secare@godrej.com (**Service**)

Follow us:  www.facebook.com/GodrejSecure

 www.twitter.com/godrejsecure

An ISO 9001:2015, ISO 14001:2015, ISO 45001:2018

Products Marketed and Serviced by Godrej and Boyce Mfg. Co. Ltd.